





Rupture Disks

3.7


3/4" FINE THREAD Typical TIP Dimensions 2 Styles

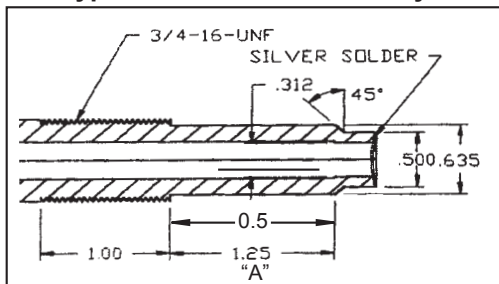

- 3/4"-16 UNF Thread
- 7/8" hex on back of body
- 1/2" NPT Thread on back

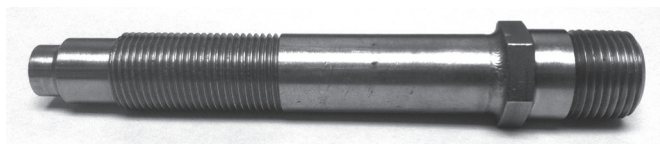

6512

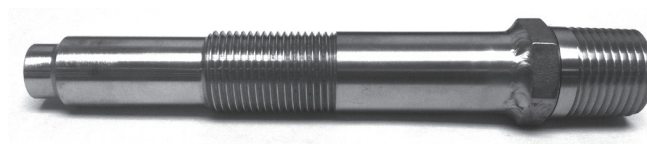

6512A

5.5" BODY (4-3/8" HEX TO TIP)				
Pressure*	Part #	List	1-4 pcs.	5+ pcs.
5000 psi	BP5000-6512		<i>call us for pricing or visit our e-store</i>	
7500 psi	BP7500-6512			
9000 psi	BP9000-6512			

8" BODY (6 3/4" HEX TO TIP)				
Pressure*	Part #	List	1-4 pcs.	5+ pcs.
5000 psi	BP5000-6812		<i>call us for pricing or visit our e-store</i>	
7500 psi	BP7500-6812			
9000 psi	BP9000-6812			

9.5" BODY (8 1/4" HEX TO TIP)				
Pressure*	Part #	List	1-4 pcs.	5+ pcs.
7500 psi	BP7500-6912		<i>call us for pricing or visit our e-store</i>	

5.5" BODY (4-3/8" HEX TO TIP)				
Pressure*	Part #	List	1-4 pcs.	5+ pcs.
5000 psi	BP5000-6512A		<i>call us for pricing or visit our e-store</i>	
7500 psi	BP7500-6512A			
9000 psi	BP9000-6512A			

8" BODY (6 3/4" HEX TO TIP)				
Pressure*	Part #	List	1-4 pcs.	5+ pcs.
5000 psi	BP5000-6812A		<i>call us for pricing or visit our e-store</i>	
7500 psi	BP7500-6812A			
9000 psi	BP9000-6812A			

*Pressure ratings at 550°F.
(See pages 3.2 and 3.3 for further information.)

2 1/2" BODY				
Pressure*	Part #	List	1-4 pcs.	5+ pcs.
3500 psi	BP3500-4212		<i>call us for pricing or visit our e-store</i>	
4500 psi	BP4500-4212			

*Pressure ratings at 400°F. (See pages 3.2 and 3.3 for further information.)

2 3/4" BODY				
Pressure*	Part #	List	1-4 pcs.	5+ pcs.
5000 psi	BP5000-5312		<i>call us for pricing or visit our e-store</i>	

*Pressure ratings at 500°F. (See pages 3.2 and 3.3 for further information.)

- 3/4"-16 UNF Thread
- Screwdriver slot on back

